




INDUCTION COOKER

雙頭電磁爐

CI-268-3 | PE2926ID-3



## Half-Bridge Technology 半橋技術

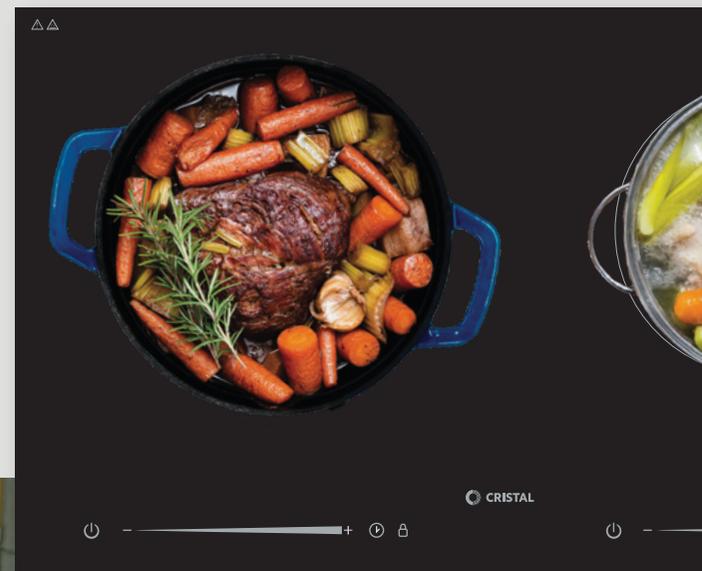

### Allows For Prolonged Slow Cooking With Stable Low-Power

Induction cooktops utilizing half-bridge technology avoid the issue of turning off unexpectedly even at the lowest power levels, making them ideal for simmering for extended periods. This lets you effortlessly enjoy the benefits of low-temperature cooking while locking in the delicious flavors of your food.

### 可長時間慢火煮食 並確保低功率烹調時火力的穩定性

用半橋技術的電磁爐就算開到最低火力，亦不會隨時關掉的情況出現，煲老火湯時就可以長時間慢火熬湯。讓你能輕鬆享受低功率烹調的樂趣同時鎖住食物鮮味。

# Specifications 規格




CI-268-3



PE2926ID-3


Power 火力 (最高可達)	Power Sharing up to 共享火力 2800W	
	Left 左 2800W	Front 前 2800W
	Right 右 2800W	Rear 後 1200W
Current 電流	13 Amps Plug 插頭	
Installation 安裝	Built-in / Free-Standing 2-in-1 嵌入式/座檯式兩用	
Panel Materials 面板物材	TOUCH TECH Ceramic Glass 瓷化玻璃	eurokera Ceramic Glass 瓷化玻璃
Energy Label 能源標籤	Complies with the latest standard Energy Label Grade 1 符合最新標準能源標籤一級	
Unit Dimension 產品尺寸	710W x 410D x 80H mm	290W x 510D x 79H mm
Cutout Dimension 開孔尺寸	670W x 360D mm	280W x 500D mm
Warranty 保用	2 Years 2年	

## Installation Diagram 安裝圖

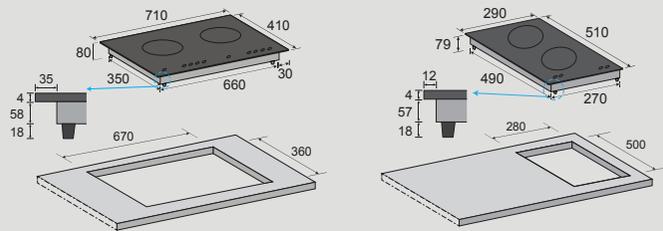

### Installation Guide 安裝指引

- \* 電磁爐安裝：四周預留最少 60 毫米散熱空間。
- \* 抽油煙機安裝：與電磁爐距離至少 60 厘米。
- \* 隔牆上安裝：廚櫃獨立分隔 100 平方厘米散熱。
- \* 隔牆頂部須有隔熱。
- \* 電磁爐底部：最少 15-25 毫米散熱空間。
- \* A minimum of 60mm distance to all sidewalls must be ensured.
- \* Cooker Hood must be built with 60cm minimum distance above the induction cooker fixed onto an oven.
- \* # When you fix the oven below the induction cooker, please be assured to maintain 100cm<sup>2</sup> ventilation space.
- \* At least 15-25mm heat ventilation space in between.



OFFICIAL WEBSITE 官方網站



GREAT TREASURE GROUP YOUTUBE



GREAT TREASURE GROUP FACEBOOK



GREAT TREASURE GROUP INSTAGRAM

# Function 功能



**Multiple Power Levels 多段火力選擇**



**Energy Saving 節能省電**



**Rapid Heating 快速加熱**



**Safety Protection 安全保護功能**



**Preset Time & Temperature 預設時間及溫度**



**Touch Control 輕觸式控制**



Built-in / Free-Standing 2-in-1 嵌入式/座檯式兩用

**TOUCH TECH**  
Ceramic Glass 瓷化玻璃  
可承受 750°C 高溫烹煮  
Can withstand 750°C high temperature.



定時功能，可自動關機  
Timer function for automatic shut-off.



兒童安全鎖，避免危險  
Child safe lock eliminate hazards.

13 Amps 插頭方便安裝及維修  
13 Amps plug for easy installation and maintenance.




**eurokera**  
Ceramic Glass 瓷化玻璃  
電磁爐玻璃材質為法國製造 瓷化玻璃  
The induction cooktop is made of French ceramic glass.  
可承受 750°C 高溫 堅硬耐熱  
Can withstand 750°C high temperature tough and heat resistant.

# Sliding control 滑動式控制

## 9 Power Levels 九段火力選擇

300 600 900 1200 1600 1900 2200 2500 2800



## 8 Power Levels 八段火力選擇

Front 前 0 - 1200W  
Rear 後 0 - 2800W

# Suitable Utensil 適合的鍋具或容器

Compatible cookware: Iron-based materials (cast iron, steel), with a flat base and a bottom diameter of 12-26 cm.

適用鍋具：鐵系（鑄鐵/鋼材），底部平坦且直徑介於 12-26 cm。



Magnetic Stainless Steel 磁性不鏽鋼鍋具



Magnetic Aluminium 磁性鋁製鍋具



Cast Iron 鑄造鍋



Magnetic Alloy Metal 磁性合金鍋具



香港綠色標誌  
香港安全標誌

總代理 SOLE AGENT

GREAT TREASURE GROUP 長富集團

長富(建材)有限公司  
Great Treasure (Building Supplies) Limited

電話 Tel (852) 2235 1688  
傳真 Fax (852) 3752 6146  
WhatsApp (852) 2235 1688  
電郵 E-mail info@gtgroup.com.hk  
網址 Website www.gtgroup.com.hk