



**Baumatic®**



# DESIGN PHILOSOPHY

---

*“ The intuition of straight lines and angles, in their playful interaction become functional design that define the aesthetic and practical elements of the product. Baumatic Appliances as pieces of modern art in people’s kitchen. ”*





*ENZO BALESTRAZZI*

FOUNDER

# BRAND HISTORY

## BUILDING THE FOUNDATION

Enzo was born in a charming place on the shores of the Mediterranean Sea where even the simple fishermen's houses had their own mark of individuality: subtle colours –often left overs of the paint used on their boats- and the “trompe d’oeil” details drawn on the facades, made each one of them unique. This simple yet original form of art stayed imprinted in his memory and became the guiding spirit of his work for years to come.



Sestri Levante, Liguria



## ESTABLISHING THE AESTHETICS

The newly born industry of built-in appliances appeared. Most household items looked dramatic and ugly, uninspiring and the few better-looking ones always came with a stiff price tag. The task for Baumatic was set: to make home kitchen amenities seamlessly beautiful yet affordable for the general public.

Early experiences of balanced beauty drove the company to follow with rigorous attention the management of space. Which, in turn, lead to a strong minimalist execution. This concept was to condition our work for many years to come and it remains true today.



Butler's Wharf, Central London



Window display



## STARTING OUR JOURNEY

Perseverance during the early recession of the nineties paid off with growth, where happiness drove creativity. The formula was right and good enough to be exported. The first area of conquest, by chance, was to be New Zealand. So it started. Gradually but rapidly, a strong bond was formed with Applico Ltd. This led to growth for both parties. With New Zealand working successfully, Australia followed after a short time. This domino effect took the brand to many other regions. Baumatic was destined to occupy a prime position in the retail and new housing business.



## WITNESSING RAPID GROWTH

Initial export markets continued to multiply, and by the new turn of the millennium the brand was beginning to be regarded as an established player throughout Central and Eastern Europe. With our customer approval rating increasing, Baumatic decided to make a substantial investment into mainstream marketing, picking up our first national TV commercial that aired prime time on national Czech television as well as ITV in the UK. Beautiful design, vibrant colours and stunning lines found each other in harmony as we dressed the city of Prague with the Baumatic aesthetic, continuing our placement as an official sponsor of Miss Czech Republic as nations watched on.

### EXCELLENCE OF DESIGN & AFFORDABILITY

Baumatic has had a newfound success in the developers scene as it provided builders with an extra edge to sell their properties. The brand took part in projects such as Inmark Tower, Sydney, The Apex, Ealing, Opus and Lohas Park in Hong Kong, Galaxy Hotel & Casino in Macao. Eventually pushing into mainland China with the Gubei Royal Palace in Shanghai & La Grande Ville in Beijing.





# BUILT-IN PRO

## HONG KONG PARTNER HISTORY

---

WE PROVIDE CUSTOMERS WITH A WIDE RANGE OF PRESTIGE HOME APPLIANCES. BEING ONE OF HONG KONG'S LARGEST BUILT-IN ELECTRICAL RETAIL GROUPS, WE EMBODY A SMOOTH CUSTOMER EXPERIENCE, RATHER THAN A SINGULAR TRANSACTION.

### A BRAND THAT CUSTOMERS TRUST

Over time BUILT-IN PRO has become not only a distributor that provides premium products and services, but a brand that represents a blend of reliability, expertise, variety and affordability, this allow us to emerge as a pillar that customers can always rely on every step of the way.

From consultation to product recommendation, delivery to installation, we take care of every single step to ensure our customer is well looked after.

### MAKING PLACES COZY AND COMFORTABLE

Founded in 2013, BUILT-IN PRO has been establishing itself as a leading Kitchen Cabinetry & Home Appliance Centre, with both online and offline distribution with multiple 10,000 sq ft showrooms around Hong Kong.

We have the capability to offer prestige brand kitchen appliances at affordable prices with unparalleled levels of service.

*When people are undecided;  
we suggest; when they have  
something specific in mind,  
we fulfil.*



## *Customer satisfaction is always our core value.*

IN THIS RESPECT WE ARE RELENTLESS IN SEARCHING FOR REMARKABLE BRANDS AND PRODUCTS WITH SUBTLE DESIGN AND SUPERB QUALITY, WHERE EXCEEDING YOUR EXPECTATIONS IS OUR GOAL.

### EXPERTISE FROM START TO FINISH

All our specialists are appliance experts who have received accredited training and grasp every opportunity to help our customers, making sure that the right products are always selected for their homes and kitchens.

The experience does not stop at the checkout; prompt delivery and comprehensive after-sale service are arranged as a whole package. From consultation to purchase to actual checkout and the usage of the product, customers are always in expert hands. Unnecessary nuisance is avoided at all costs.

### TOGETHER, WE THRIVE

As a distributor, we can never succeed without the continuous support from prominent brands that incessantly furnish us with all their high-quality products. Together we have, and will continue to impress our customers by reaching beyond their expectation.

From various brands to BUILT-IN PRO and to our customers, it is our responsibility to ensure we all prosper together.





# LINEA ROSSA





# BUILT-IN OVENS


**LINEA ROSSA IS GEOMETRY AND SPACE MANAGEMENT,  
THE TWO FUNDAMENTAL PILLARS OF OUR DESIGN,  
HIGHLIGHTED BY A SINGLE RED LINE.**





## BOM662RD

### 60CM BUILT-IN

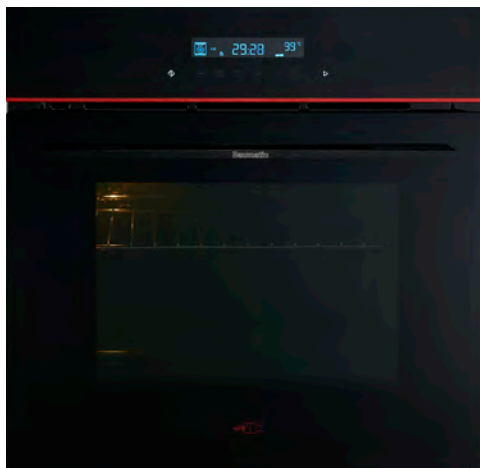

**OVEN CAPACITY:** 65 litres  
**TEMPERATURE RANGE:** 50°C - 250°C

**\$7,380**

#### 10 PROGRAM FUNCTIONS

1. Light
2. Fan & lower element
3. Conventional oven
4. Conventional oven & fan assist
5. Centre grill
6. Full grill
7. Full grill & fan
8. Circular element & fan
9. Defrost
10. Conventional oven & fan force


**FULL TOUCH CONTROL  
FUNCTION & TEMPERATURE DISPLAY  
TRIPLE-GLAZED REMOVABLE DOOR  
COOLING FAN  
REMOVABLE CHROME SIDE RACKS  
EASY CLEAN BLACK ENAMEL CAVITY**

#### STANDARD ACCESSORIES

- 1 x enamelled baking tray
- 1 x safety shelf

#### TECHNICAL DATA

Appliance dimensions in mm  
(h x w x d): 595 x 595 x 555 Ap-  
erture dimensions in mm  
(h x w x d): 589 x 560 x 580  
Total Connected Load: 2.975kW  
Fuse Rating: 15A  
Rated Voltage: 220-240V  
Rated Frequency: 50Hz  
EU Energy Class: A



## BMO620BL

### 60CM BUILT-IN



**OVEN CAPACITY:** 70 litres  
**TEMPERATURE RANGE:** 50°C - 250°C

**\$6,480**

#### 9 PROGRAM FUNCTIONS

1. Light
2. Defrost
3. Full grill & fan
4. Full grill
5. Centre grill
6. Conventional oven & fan assist
7. Conventional oven
8. Lower element
9. Circular element & fan


**LED PROGRAMMABLE TIMER  
FUNCTION & TEMPERATURE DISPLAY  
COOLING FAN  
TRIPLE-GLAZED REMOVABLE DOOR  
REMOVABLE INNER DOOR GLASS  
CHROME SIDE RACKS  
EASYSOON CLEAN BLACK ENAMEL CAVITY**

#### STANDARD ACCESSORIES

- 1 x telescopic runner
- 1 x enamelled baking tray with trivet
- 2 x safety shelves

#### TECHNICAL DATA

Appliance dimensions in mm  
(h x w x d): 595 x 595 x 575  
Aperture dimensions in mm  
(h x w x d): 590 x 580 x 570  
Total connected load: 3kw  
Fuse Rating: 15A  
Rated Voltage: 220-240V  
Rated Frequency: 50/60Hz  
EU Energy class: A



# BUILT-IN OVENS

## B0905X

### 90CM BUILT-IN



**OVEN CAPACITY:** 100 litres  
**TEMPERATURE RANGE:** 50°C - 250°C

**\$16,800**

#### 9 PROGRAM FUNCTIONS

1. Light
2. Defrost
3. Full grill
4. Circular element & fan
5. Lower element
6. Conventional oven
7. Conventional oven & fan assist
8. Inner grill & fan
9. Full grill & fan

#### **ROTISSERIE FUNCTION**

#### **LED TIMER**

#### **TRIPLE-GLAZED REMOVABLE DOOR**

#### **COOLING FAN**

#### **REMOVABLE CHROME SIDE RACKS**

#### **EASY CLEAN BLACK ENAMEL CAVITY**


#### **INTERIOR LIGHT**

#### STANDARD ACCESSORIES

- 1 x rotisserie
- 1 x enamelled baking tray with trivet
- 1 x safety shelf

#### TECHNICAL DATA

Appliance dimensions in mm  
 (h x w x d): 475 x 895 x 548  
 Aperture dimensions in mm  
 (h x w x d): 472 x 860 x 550  
 Total Connected Load: 3.4kW  
 Fuse Rating: 16A  
 Rated Voltage: 220-240V  
 Rated Frequency: 50/60Hz  
 EU Energy Class: A

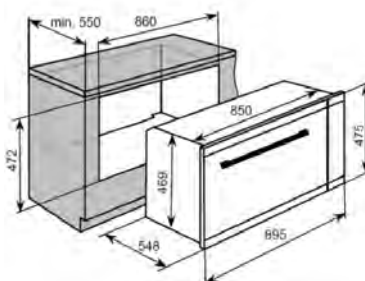



## BOMC465X

### 45CM BUILT-IN COMBI MICROWAVE



**OVEN CAPACITY:** 44 litres  
**TEMPERATURE RANGE:** 50°C - 250°C

**\$9,880**

#### 13 PROGRAM FUNCTIONS

Touch control operation  
LED display  
Overheat protection  
Electronic clock programmer  
Programmer end signal  
Stainless steel cavity  
Child lock  
Triple door glass

#### **5 MICROWAVE POWER LEVELS**

#### **5 OVEN POWER LEVELS**

#### **3 GRILL POWER LEVELS**


**FAST PREHEATING: 5 MINS TO 230°C**

#### STANDARD ACCESSORIES

Round tray  
Round grill rack  
Glass tray (optional)  
Square grill rack (optional)

#### TECHNICAL DATA

Appliance dimensions in mm  
(h x w x d): 454 x 595 x 568  
Cavity dimensions in mm  
(h x w x d): 452 x 570 x 575  
Microwave output: 900W  
Top grill output: 1200W  
Bottom grill output: 600W  
Convection output: 1750W  
Max. connected load: 3350 W  
Rated voltage: 230V  
Rated frequency: 50Hz  
Fuse rating: 15A  
Cable length: 1.5m

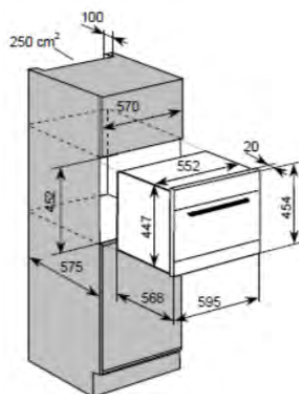

## BMG220X

### 38CM BUILT-IN MICRO W/ GRILL



**OVEN CAPACITY:** 20 litres

**\$3,680**

#### 8 AUTO COOKING MENUS


Grill function  
Push button / knob control operation  
Child safety lock  
Speedy cooking  
Quick start  
Stainless steel cavity  
Stainless steel front panel & trim kit  
Silver housing cabinet  
Microwave & trim kit packaged in one carton  
Defrost function  
Pause function

#### STANDARD ACCESSORIES

Grill rack  
Grass tray

#### TECHNICAL DATA

Appliance dimensions in mm  
(h x w x d): 388 x 595 x 343.5  
Aperture dimensions in mm  
(h x w x d): 380 x 560 x 340  
Microwave output: 800W  
Grill output: 1000W  
Max. connected load: 1250W  
Rated voltage: 230V  
Rated frequency: 50Hz  
Fuse rating: 13A  
Cable length: 1m

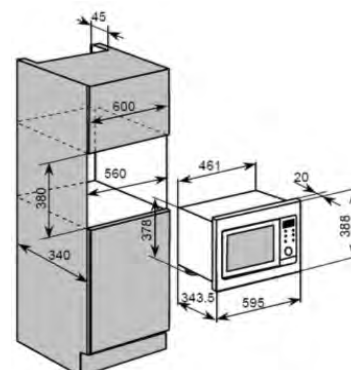

# BUILT-IN OVENS

THE BAUMATIC DIFFERENCE.

**LARGE CAPACITY TRAYS WITH THE ABILITY TO  
COOK & BAKE DIFFERENT DISHES AT THE SAME TIME.**



# OVEN FUNCTIONS

THIS SECTION WILL HELP YOU UNDERSTAND HOW YOUR OVEN WORKS AND HOW TO CHOOSE THE APPROPRIATE FUNCTION. PLEASE NOTE THAT DIFFERENT MODELS MAY HAVE DIFFERENT COMBINATION OF FUNCTION.




## LOWER ELEMENT

This method of cooking uses the lower element to direct heat upward to the food. For slow-cooking recipes or for warming up meals.



## CONVENTIONAL OVEN

Top element and lower element. This method of cooking provides traditional cooking with heat from the top and lower elements. Particularly suitable for roasting and baking on one shelf at a time.




## FULL GRILL

This cooking method is normal grilling utilising the inner and outer parts of the top element, which directs heat downward onto the food. Suitable for grilling medium or large portions of sausages, bacon, steaks, fish etc.



## CONVECTION OVEN & FAN ASSIST

This method of cooking provides traditional cooking with heat from the top and lower elements, plus the use of the circulation fan to ensure a fast and even distribution of the heat. Suitable for light and delicate baking such as pastries.



## CIRCULAR ELEMENT WITH FAN

This method of cooking uses the circular element while the heat is distributed by the fan, resulting in a faster and more economical operation. Cooking with the fan on allows different kinds of food to be cooked simultaneously on different shelves, preventing the transmission of smells and tastes from one dish to another.



## LIGHT

All our ovens are fitted with an interior light. The light activates itself upon startup and use throughout the culinary process.



## OUTER TOP ELEMENT

This method of cooking uses the outer part of the top element to direct heat downwards onto the food. For gentle cooking, browning or keeping cooked dishes warm.



## CENTRE GRILL

This cooking method is normal grilling utilising the inner part only of the top element, which directs heat downward onto the food. Suitable for grilling small portions of bacon, toast, meat etc.



## FAN & LOWER ELEMENT

This cooking method uses the bottom element only, while the fan is circulating the heat. For delicate dishes and heating pre-cooked food. It is also suitable for sterilising preserving jars.



## PIZZA FUNCTION

This method of cooking uses the lower and circular elements, while heat is distributed by the fan. It reproduces the same conditions of traditional clay wood-fire stoves.



## FAN & GRILL

This method of grilling uses the top element in conjunction with the fan to create a fast circulation of heat. Suitable where quick browning is required and with 'sealing' the juices in, such as with steaks, hamburgers, some vegetables etc.





### **GRILL & ROTISSERIE**

Please check your model number to establish if the rotisserie accessory is supplied. This function will operate the rotisserie as well as the grill simultaneously, giving a moderate to strong heat. Best for chickens, kebabs and small to medium roasts.



### **GRILL & ROTISSERIE WITH FAN**

Please check your model number to establish if the rotisserie accessory is supplied. This function will operate the rotisserie as well as the grill and fan simultaneously, giving a moderate to strong heat. Best for chickens, kebabs and small to medium roasts.



### **STEAM ONLY**

This function is suitable for all types of steam cooking. Single out your experience by using only steam in the process.



### **GRILL WITH STEAM AND FAN FORCED WITH STEAM**

Grill and steam is used for traditional heat cooking, roasting, baking and grilling, while the fan forced and steam function is suitable for cooking with steam and traditional heat together to obtain a moister result of traditional cooking or a dryer and browner effect for steam cooking.



### **LOW TEMPERATURE**

This type of cooking can be used for proving, defrosting, preparing yoghurt, heating dishes at the required speed and slow cooking at low temperatures. The temperature options are: 40, 65 and 90 °C.



### **FAST COOKING**

This function requires the oven to be preheated. This function is particularly suitable for cooking pre-packed food quickly (frozen or pre cooked).



### **DEFROST**

The fan runs without heat to reduce the defrosting time of frozen foods. The time required to defrost the food will depend on the room temperature, the quantity and type of food. Always check food packaging for instructions.



### **MULTI LEVEL**

This is a general cooking function which allows you to cook different type of foods on separate racks at the same time. With all the heating elements on and aided by the fan, the temperature will be uniform throughout the oven cavity. The food on the different racks will cook, roast and brown evenly.



### **STEAM CLEAN**

Any Baumatic oven with wipe clean oven enamel, can use our SteamClean method of cleaning. Simply place some warm water and a little washing up liquid in a baking tray, place it in the lowest shelf position and then select an oven function (either conventional or fan oven) The temperature should be set to 80°C and the oven run for 20 minutes. All that is left to do is simply wipe over the walls and side racks with a damp cloth.



### **PYROLYTIC CLEANING**

Cleans the oven cavity by raising the inner oven temperature to approximately 500°C. The resultant ash deposits can be wiped away with a soft, damp cloth once the oven has cooled down. For best results, the oven should not be completely cold, but still slightly warm. There are 3 pyrolytic programs with varying duration. Choose the one most suitable according to how dirty the inner cavity of the oven is at the end of cooking. When selected, the door will automatically lock itself and will remain locked until the cycle has been completed and the temperature has dropped to a safe level.







# COMBI-STEAM OVENS

## THE MOST ADVANCED TECHNOLOGY AVAILABLE.

Provides healthier, better looking and better tasting results. Select among the many pre-set cooking programs to choose from, whether it's steam cooking only, or at your will, other programs where steam interacts with traditional cooking. Finally, you can now have traditional heat only as well.

*Be amazed. be happier, and stay healthier.*





## BCS495BGL

### 45CM BUILT-IN COMBI STEAM



**OVEN CAPACITY:** 56 litres

**\$7,980**

#### 14 PROGRAM FUNCTIONS

Top and bottom heat element  
Static convectional, Pizza  
Centre grill, Full grill  
Circular element with fan  
Fan & grill, One key bread  
Keep warm, Defrost  
Steam only, High temp steam  
Ferment, Descale


**ELECTRONIC FOLDING CONTROL PANEL**  
**FULL TOUCH OPERATION**  
**LED DISPLAY, INTERIOR LIGHT**  
**ELECTRONIC CLOCK PROGRAMMER**  
**3 GLASS REMOVABLE DOOR**  
**CHILD LOCK**

#### STANDARD ACCESSORIES

1 x oil tray  
1 x food tray  
1 x grill tray  
1 x insulated glove

#### TECHNICAL DATA

Appliance dimensions in mm  
(h x w x d): 455 x 595 x 555  
Aperture dimensions in mm  
(h x w x d): 460 x 895 x 548  
Total connected load: 2.8kW  
Voltage: 220V  
Frequency: 50/60Hz  
Fuse rating: 13A



## BCS495RD

### 45CM BUILT-IN COMBI STEAM



**OVEN CAPACITY:** 56 litres

**\$7,980**

#### 14 PROGRAM FUNCTIONS

Top and bottom heat element  
Convectional, Pizza  
Centre grill, Full grill  
Circular element with fan  
Fan & grill, One key bread  
Keep warm, Defrost  
Steam only, High temp steam  
Ferment, Descale


**ELECTRONIC FOLDING CONTROL PANEL**  
**FULL TOUCH OPERATION**  
**LED DISPLAY, INTERIOR LIGHT**  
**ELECTRONIC CLOCK PROGRAMMER**  
**3 GLASS REMOVABLE DOOR**  
**CHILD LOCK**

#### STANDARD ACCESSORIES

1 x oil tray  
1 x food tray  
1 x grill tray  
1 x insulated glove

#### TECHNICAL DATA

Appliance dimensions in mm  
(h x w x d): 455 x 595 x 555  
Aperture dimensions in mm  
(h x w x d): 460 x 895 x 548  
Total connected load: 2.8kW  
Voltage: 220V  
Frequency: 50/60Hz  
Fuse rating: 13A

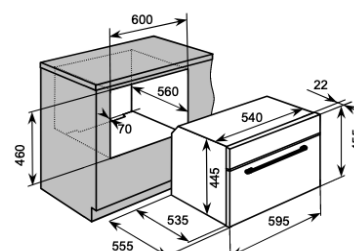

# STEAM VARIATIONS

## BSMC456BGL

## BCS420ASS

### 45CM BUILT-IN COMBO MICRO W/ STEAM



**OVEN CAPACITY:** 34 litres

**\$11,800**

#### 5 FUNCTIONS W/ 80 AUTO COOK COMBINATIONS

Microwave, Grill, Steam, Convection oven  
Grill & fan, Microwave & grill with fan  
Microwave & grill, Microwave & convection oven  
Defrost, Convection & steam, Microwave & steam  
Steam temperature range: 50 °C to 100 °C

**5 MICROWAVE POWER LEVELS**  
**FULL TOUCH CONTROL**  
**LED DISPLAY, INTERIOR LAMP**  
**STAINLESS STEEL CAVITY**  
**DIGITAL CLOCK (24 HR SYSTEM)**  
**95 MINUTES DIGITAL TIMER**  
**PREHEAT, COOKING END SIGNAL**


**TRIPLE GLAZED DOOR**  
**OVERHEAT PROTECTION**  
**DEFROST BY WEIGHT**  
**PAUSE, QUICK START**  
**SHORT-CIRCUIT DEFENSE**  
**COOLING FAN**  
**CHILD LOCK**

#### STANDARD ACCESSORIES

1 x Glass Tray  
1 x Square Rack

#### TECHNICAL DATA

Appliance dimensions in mm  
(h x w x d): 454 x 595 x 525  
Aperture dimensions in mm  
(h x w x d): 460 x 560 x 550  
Total connected load: 3300W  
Microwave Output: 1550W  
Grill Output: 1200W  
Steam Output: 1500W  
Convection: 1750W  
Rated frequency: 50Hz  
Rated voltage: 230V  
Fuse rating: 20A



### 38 CM BUILT-IN COMBO STEAM



**OVEN CAPACITY:** 26 litres

**\$5,980**

#### 6 FUNCTIONS W/ SPECIAL HEATING METHODS

High temperature steam  
Keep warming (60°C)  
Ferment (40°C)  
Disinfection (115°C)  
Steamer temperature: 80°C - 115°C  
Oven temperature: 120°C - 250°C  
Defrost temperature: 60°C


**FULL TOUCH CONTROL OPERATION**  
**LED DISPLAY, INTERIOR LAMP**  
**STAINLESS STEEL CAVITY**  
**TIMER WITH ALARM FUNCTION**  
**AUTO CLEANING ON WATER DRIP TRAY**  
**COOLING FAN**

#### STANDARD ACCESSORIES

1 x grill rack  
1 x baking tray

#### TECHNICAL DATA

Appliance dimensions in mm  
(h x w x d): 388 x 595 x 374  
Aperture dimensions in mm  
(h x w x d): 380 x 564 x 380  
Steam output: 800W  
Oven output: 1300W  
Total connected load: 2100W  
Rated voltage: 220V  
Rated frequency: 50Hz  
Fuse rating: 13A

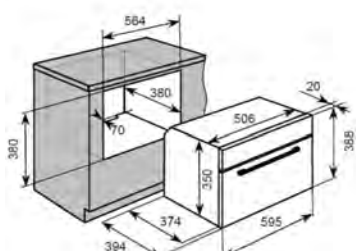



**FASTER.  
HEALTHIER.  
SMARTER.**



# FREESTANDING

## BS4001

### 12 COOKING FUNCTIONS

Steam, Grill, Full grill, Convection, Super Steam, Disinfect, Ferment, Keep warm, Defrost, Convection steam



**\$7,380**

FULL TOUCH CONTROL OPERATION  
ELECTRONIC ANIMATED TIMER WITH  
FUNCTION DISPLAY  
SUS304 STAINLESS STEEL CAVITY  
TEMPERATURE RANGE : 50 °C TO 250 °C  
FAN FORCED COOKING  
ROTISSERIE  
COOLING FAN  
COOKING END SIGNAL

**OVEN CAPACITY:** 40 litres  
**WATER TANK:** 1 litre

#### STANDARD ACCESSORIES

Wire shelf  
Oil collector Grill tray  
Lower grill rack  
Rotisserie  
Glove

#### TECHNICAL DATA

Appliance dimensions in mm  
(h x w x d): 416 x 502 x 499  
Steam output: 1200W  
Total connected load: 2100W  
Rated voltage: 220V  
Rated frequency: 50Hz  
Fuse rating: 13A

## BSQ26CBK

### 10 COOKING FUNCTIONS

Steam, Grill, Full grill, Convection, Super Steam, Disinfect, Ferment, Keep warm, Defrost, Convection steam



**\$6,680**

FULL TOUCH CONTROL OPERATION  
ELECTRONIC ANIMATED TIMER WITH FUNCTION  
DISPLAY STAINLESS STEEL CAVITY  
TEMPERATURE RANGE : 40 °C TO 250 °C  
1 X 25W INTERIOR LAMP  
COOLING FAN  
COOKING END SIGNAL  
DOUBLE GLAZED DOOR  
OVERHEAT PROTECTION

**OVEN CAPACITY:** 26 litres  
**WATER TANK:** 1 litre

#### STANDARD ACCESSORIES

Wire shelf  
Oil collector  
Grill tray  
Lower grill rack

#### TECHNICAL DATA

Appliance dimensions in mm  
(h x w x d): 349 x 505 x 478  
Steam output: 1000W  
Total connected load: 2100W  
Rated voltage: 220V  
Rated frequency: 50Hz  
Fuse rating: 13A

## BSQ2808BL

### 9 COOKING FUNCTIONS

Steam, Grill, Steam and Grill, Grill Meat, Steam Fish, Steam Vegetable, Disinfect, Ferment, Steam bun 50 pre-set cooking menu



**\$5,980**

KNOB AND TOUCH CONTROL  
TEMPERATURE RANGE: 40 - 230 °C  
LED DISPLAY  
DOUBLE-GLAZED DOOR  
EASY CLEAN BLACK ENAMEL CAVITY  
TIME AND TEMPERATURE ADJUSTMENT  
INTERIOR LIGHT  
COOLING FAN

**OVEN CAPACITY:** 26 litres  
**WATER TANK:** 1 litre

#### STANDARD ACCESSORIES

Food tray  
Grill tray

#### TECHNICAL DATA

Appliance dimensions in mm  
(h x w x d): 350 x 505 x 440 mm  
Steam output: 1000W  
Total connected load: 1500W  
Rated voltage: 220V  
Rated frequency: 50Hz  
Fuse rating: 13A





# ELECTRIC HOBS

## EVOLUTION OF THE SPECIES FOR THE BEST RESULTS.

Choose the unparalleled speed, flexibility and safety of induction. Or perhaps the traditional ease of ceramic. And, why not, the hob which has both systems together.

Feel comfortable with what you choose.

*Be yourself with Baumatic.*



## BHI637.1

## BCP601

### 60CM 3-ZONE INDUCTION




1 x 2.3kW (booster to 3.0kW) induction zone, Ø 280 mm  
1 x 1.5kW induction zone, Ø 160mm  
1 x 2.0kW induction zone, Ø 180mm

**\$7,980**


**SCHOTT® CERAMIC GLASS**  
**4-SIDE BEVELLED EDGE**  
**DIRECT SENSOR TOUCH CONTROL**  
**9 STAGE POWER SETTING**  
**BOOSTER TO 3.0KW ON LARGE ZONE**  
**TIMER WITH AUTO SWITCH OFF OPTION**  
**AUTO PAN RECOGNITION**  
**CHILD SAFETY LOCK**  
**RESIDUAL HEAT INDICATORS**  
**OVERHEAT PROTECTION**

#### TECHNICAL DATA

Appliance dimensions in mm  
(H x W x D): 60 x 590 x 520  
Aperture dimensions in mm  
(H x W x D): 100 x 565 x 495  
Total connected load: 6500W  
Rated voltage: 220-240V  
Rated frequency: 50Hz / 60Hz  
Cable length: 1.2m



### 60CM 4-ZONE CERAMIC

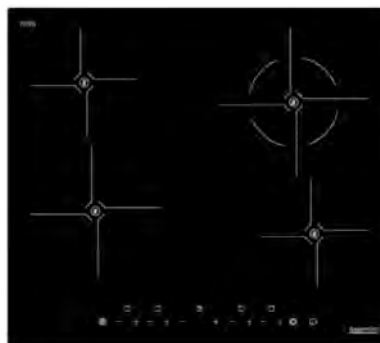


1 x 1.00kW / 2.20kW hyper-speed zone, Ø 138mm / 230mm  
1 x 1.80kW hyper-speed zone, Ø 200mm  
2 x 1.20kW hyper-speed zone, Ø 165mm

**\$5,580**

**SCHOTT® CERAMIC GLASS**  
**DIRECT SENSOR TOUCH CONTROL**  
**9 STAGE POWER SETTING**  
**1 X EXTENDABLE DOUBLE ZONE**  
**HYPERSPEED ZONES**  
**TIMER WITH AUTO SWITCH OFF OPTION**  
**CHILD SAFETY LOCK**  
**RESIDUAL HEAT INDICATORS**  
**OVERHEAT PROTECTION**

#### TECHNICAL DATA

Appliance dimensions in mm  
(H x W x D): 52 x 590 x 520  
Aperture dimensions in mm  
(H x W x D): 100 x 565 x 495  
Total connected load: 6400W  
Rated voltage: 220-240V  
Rated frequency: 50/60Hz  
Cable length: 1m



# ELECTRIC HOBS

## BHI222.5

### 73CM 2-ZONE INDUCTION




1 x 1.5kW induction zone, boost to 2.0kW, Ø210mm  
1 x 2.0kW induction zone, boost to 2.4kW, Ø210mm

**\$6,980**

**SCHOTT® CERAMIC GLASS**  
**SLIDER TOUCH CONTROL**  
**9 STAGE POWER SETTING**  
**BOOSTER ON BOTH ZONES**  
**KEEP WARM FUNCTION**  
**PAUSE FUNCTION**  
**TIMER WITH AUTO SWITCH OFF OPTION**  
**AUTO PAN RECOGNITION**  
**CHILD SAFETY LOCK**  
**RESIDUAL HEAT INDICATORS**  
**OVERHEAT PROTECTION**

#### TECHNICAL DATA

Appliance dimensions in mm  
(h x w x d): 62 x 730 x 430  
Aperture dimensions in mm  
(h x w x d): 70 x 695 x 410  
Total connected load: 4000W  
Rated voltage: 220-240V  
Rated frequency: 50Hz Cable  
Cable length: 1m

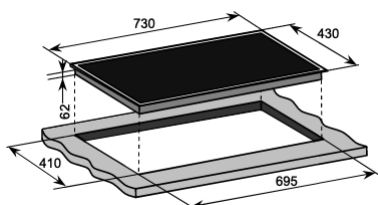

## BHI244

### 68CM 2-ZONE INDUCTION




2 x 2.0kW induction zone, Ø200mm

**\$4,980**

**CRYSTALLINE CERAMIC GLASS**  
**DIRECT SENSOR TOUCH CONTROL**  
**10 STAGE POWER SETTING**  
**TEMPERATURE OR**  
**POWER LEVEL CONTROL**  
**MINUTE MINDER TIMER**  
**AUTO PAN RECOGNITION**  
**CHILD SAFETY LOCK**  
**RESIDUAL HEAT INDICATORS**  
**OVERHEAT PROTECTION**

#### TECHNICAL DATA

Appliance dimensions in mm  
(h x w x d): 68 x 680 x 380  
Aperture dimensions in mm  
(h x w x d): 75 x 650 x 360  
Total connected load: 2800w  
Rated voltage: 220-240V  
Rated frequency: 50/60Hz  
Cable length: 1.5m

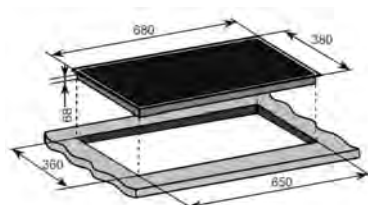

## BHIC243

### 68CM 2-ZONE INDUCTION + CERAMIC




1 x 2.0kW induction zone, Ø 200 mm  
1 x 2.0kW ceramic zone, Ø 200 mm


**\$4,980**

**CRYSTALLINE CERAMIC GLASS**  
**DIRECT SENSOR TOUCH CONTROL**  
**10 STAGE POWER SETTING**  
**TEMPERATURE OR**  
**POWER LEVEL CONTROL**  
**MINUTE MINDER TIMER**  
**AUTO PAN RECOGNITION (INDUCTION)**  
**CHILD SAFETY LOCK**  
**RESIDUAL HEAT INDICATORS**  
**OVERHEAT PROTECTION**

#### TECHNICAL DATA

Appliance dimensions in mm  
(h x w x d): 68 x 680 x 380  
Aperture dimensions in mm  
(h x w x d): 75 x 650 x 360  
Total connected load: 2800w  
Rated voltage: 220-240V  
Rated frequency: 50/60Hz  
Cable length: 1.5m

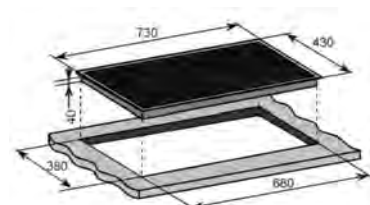

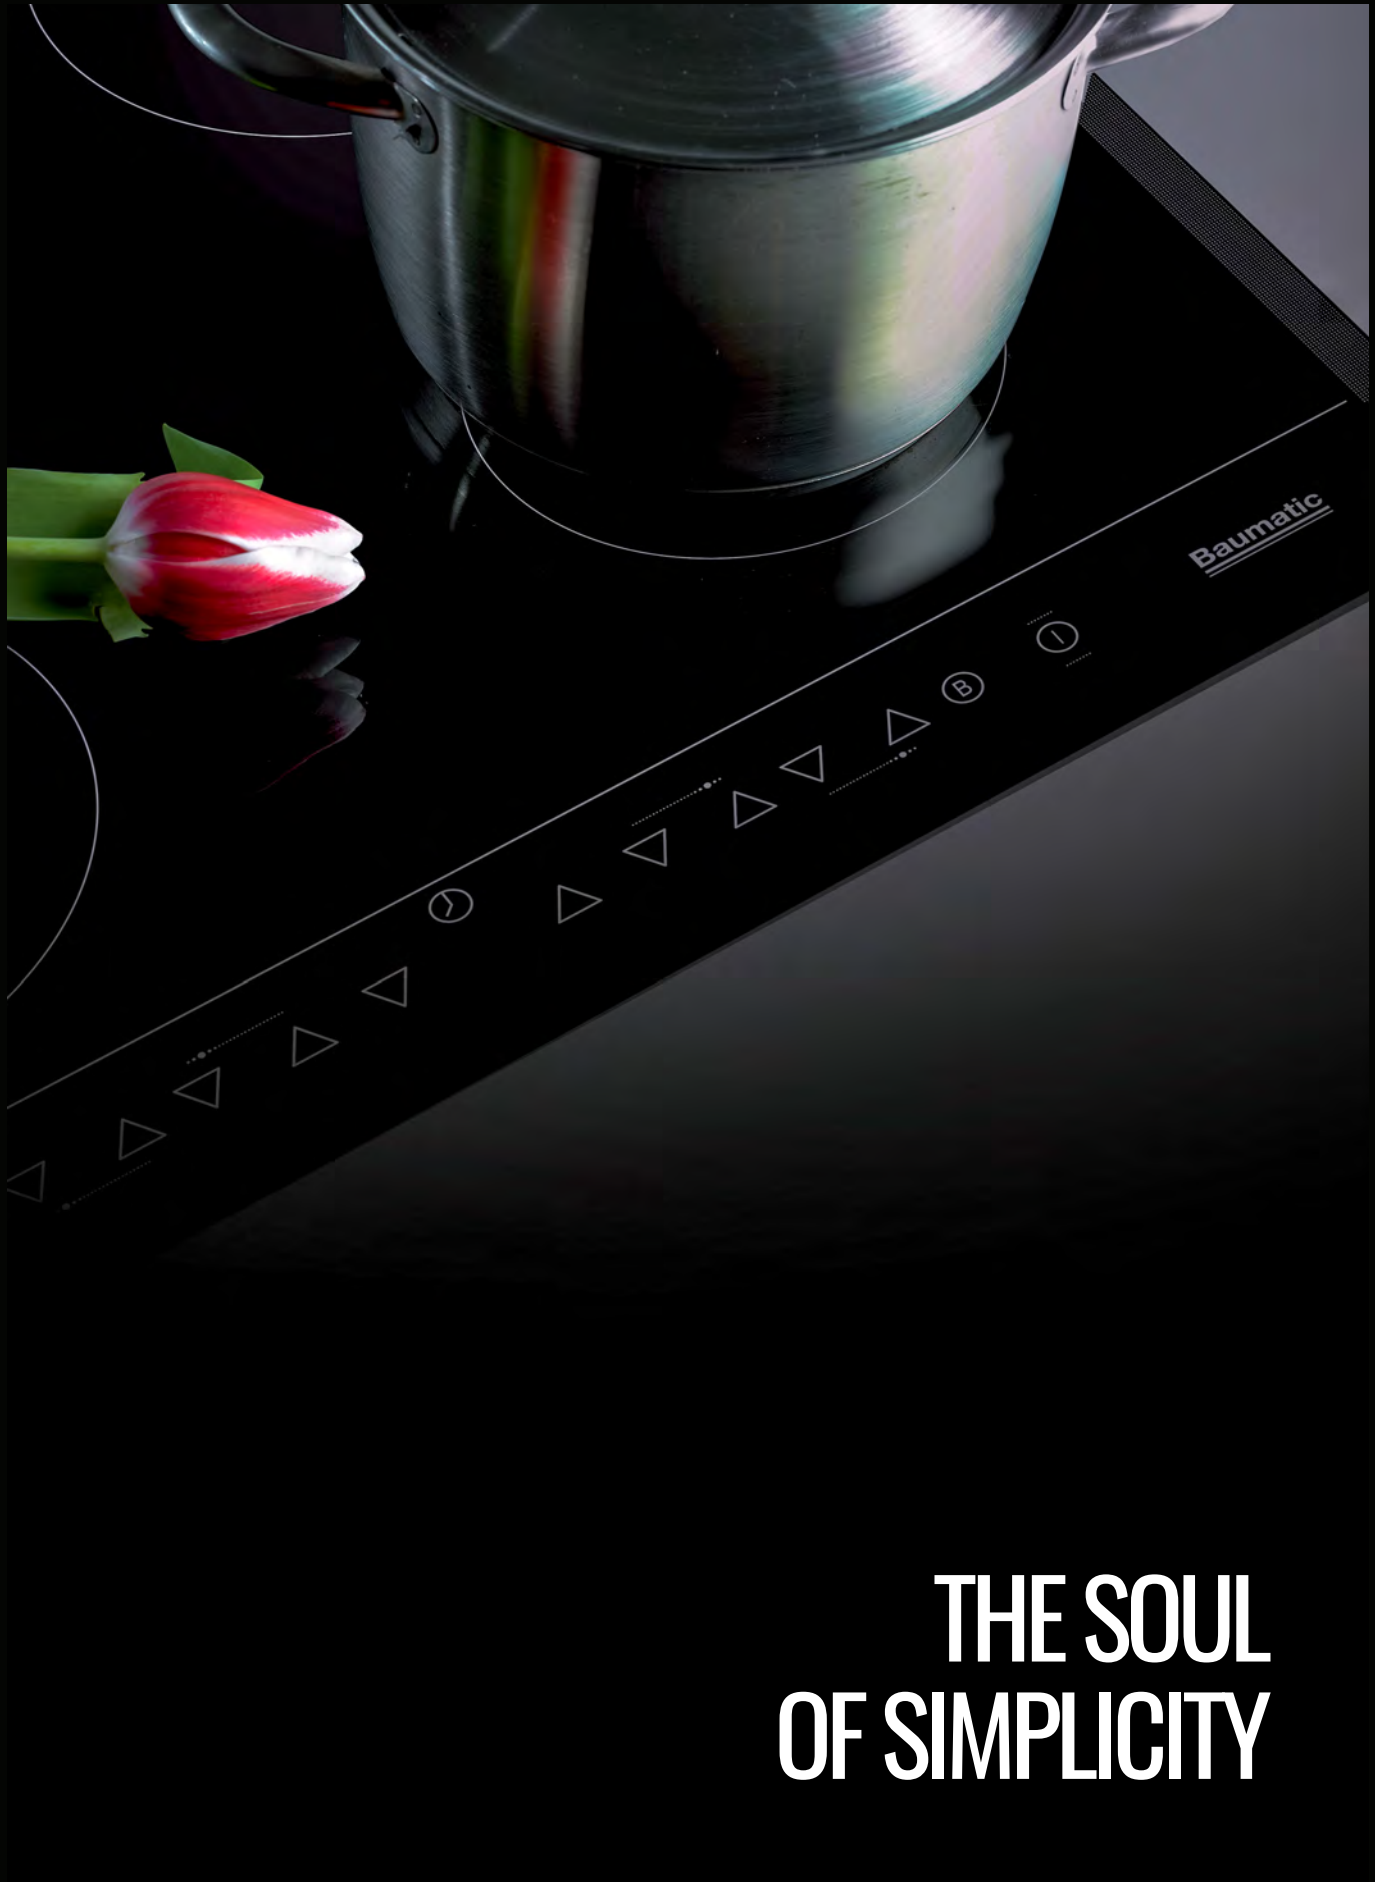

THE SOUL  
OF SIMPLICITY

# ELECTRIC HOBS

## BHI335

### 30CM FLEXI 2-ZONE INDUCTION DOMINO

1 x 1.80kW induction zone, Ø 196mm  
1 x 1.80kW induction zone, Ø 196 mm




**\$5,980**

SCHOTT(ADD R LOGO) CERAMIC GLASS  
SLIDER TOUCH CONTROL  
FLEXI DUAL-ZONE CONTROL  
9 STAGE POWER SETTING  
KEEP WARM FUNCTION  
PAUSE & GO FUNCTION  
BOIL CUE FUNCTION  
TIMER WITH AUTO SWITCH OFF OPTION  
AUTO PAN RECOGNITION  
CHILD SAFETY LOCK  
RESIDUAL HEAT INDICATORS  
OVERHEAT PROTECTION

#### TECHNICAL DATA

Appliance dimensions in mm  
(h x w x d): 56 x 288 x 520  
Aperture dimensions in mm  
(h x w x d): 100 x 275 x 510  
Total connected load: 3600W  
Rated voltage: 220-240V  
Rated frequency: 50/60Hz  
Cable length: 1.5m



## BHI305.2

### 30CM 2-ZONE INDUCTION DOMINO

1 x 2.00kW induction zones, Ø 180 mm  
1 x 1.50kW induction zone, Ø 140 mm




**\$3,980**

CRYSTALLINE CERAMIC GLASS  
DIRECT SENSOR TOUCH CONTROL  
9 STAGE POWER SETTING  
TIMER WITH AUTO SWITCH OFF OPTION  
AUTO PAN RECOGNITION  
CHILD SAFETY LOCK  
RESIDUAL HEAT INDICATORS  
OVERHEAT PROTECTION  
13A PLUG FITTED

#### TECHNICAL DATA


Appliance dimensions in mm  
(h x w x d): 58 x 288 x 52  
Aperture dimensions in mm  
(h x w x d): 100 x 268 x 500  
Total connected load: 2800W  
Rated voltage: 220-240V  
Rated frequency: 50/60Hz  
Cable length: 1.5m

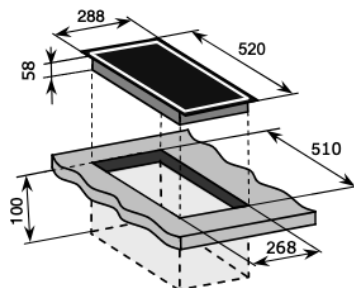

## BHC305.2

### 30CM 2-ZONE CERAMIC DOMINO

1 x 1.80kW hyper-speed zone, Ø 200 mm  
1 x 1.20kW hyper-speed zone, Ø 165 mm

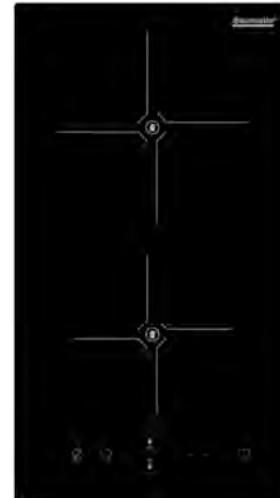



**\$3,680**

CRYSTALLINE CERAMIC GLASS  
DIRECT SENSOR TOUCH CONTROL  
9 STAGE POWER SETTING  
HYPER-SPEED ZONES  
TIMER WITH AUTO SWITCH OFF OPTION  
CHILD SAFETY LOCK  
RESIDUAL HEAT INDICATORS  
OVERHEAT PROTECTION

#### TECHNICAL DATA

Appliance dimensions in mm  
(L x W x H): 520 x 288 x 520  
Aperture dimensions in mm  
(L x W x H): 100 x 268 x 500  
Total connected load: 3000W  
Rated voltage: 220-240V  
Rated frequency: 50/60Hz  
Cable length: 1m

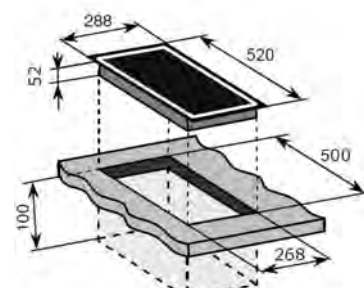

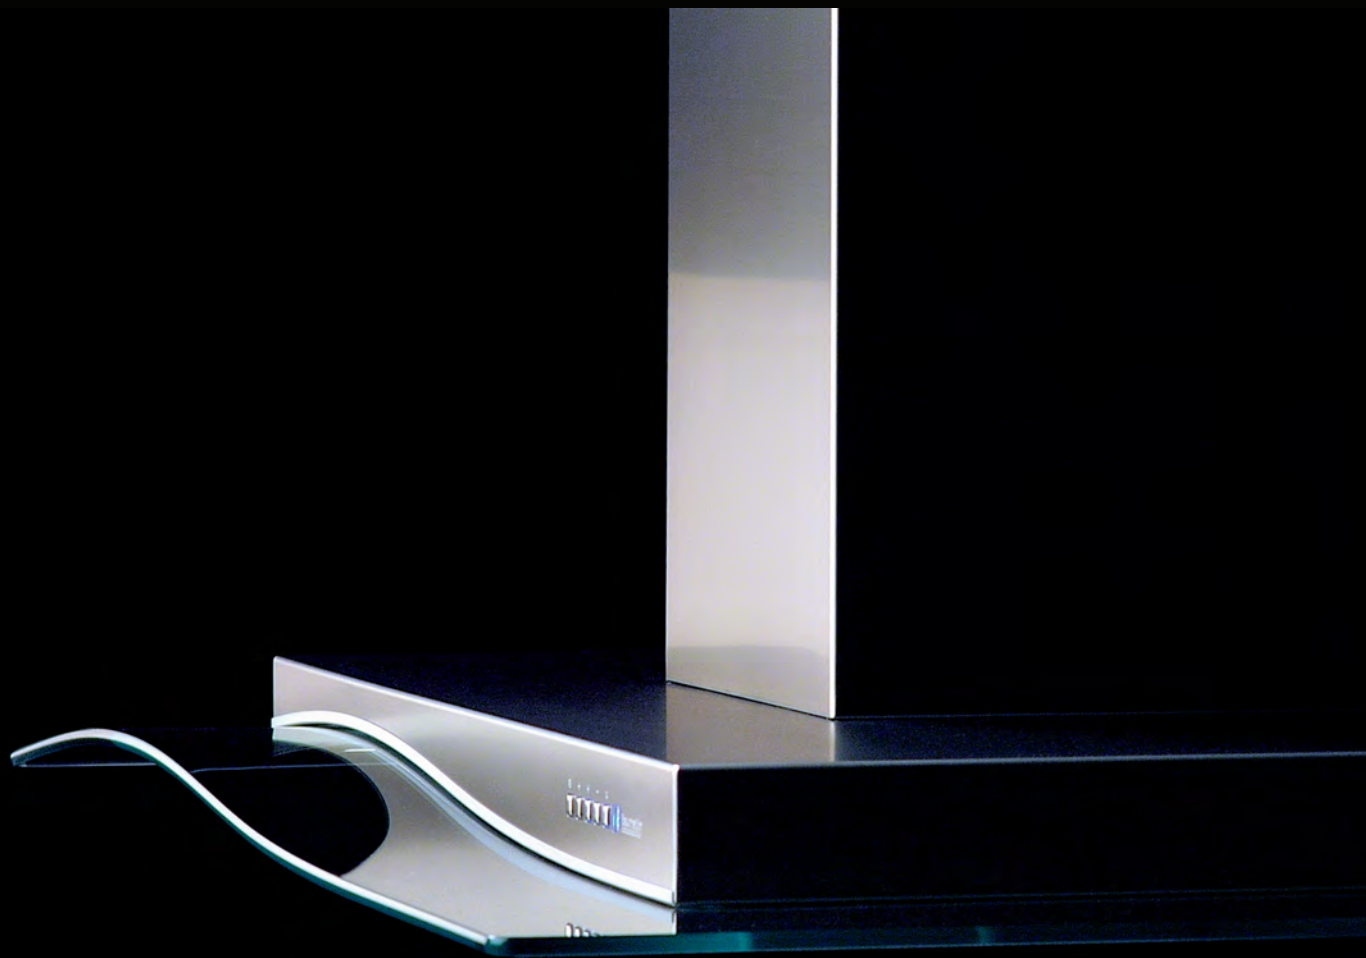

# COOKER HOODS

**SOLID-BUILT MACHINERY MADE TO OPERATE EFFORTLESSLY.**

The strong extraction power managed by the Baumatic experience.  
The first brand to introduce the European Cooker Hoods in Asia.



## BEI124X

### 120CM STAINLESS STEEL ISLAND T BOX



**EXTRACTION RATE:** 1200m<sup>3</sup>/hr

**\$16,880**


STAINLESS STEEL SUS430  
ELECTRONIC PUSH BUTTON CONTROL  
3 SPEED SETTINGS  
PERIMETER EXTRACTION SYSTEM  
3 X ALUMINUM GREASE FILTERS  
1 X 8W LED LIGHTBOARD PANEL  
2 X 600MM ADJUSTABLE  
CHIMNEY STACKS

#### OPTIONAL ACCESSORIES

Carbon filter for recirculation

#### TECHNICAL DATA

Appliance dimension in mm  
(h x w x d): 650-1150 x 1200 x 600  
Rated voltage: 220-240V  
Rated frequency: 50 / 60Hz  
Max connected load: 328w



## BET128.5X

### 120CM STAINLESS STEEL T BOX



**EXTRACTION RATE:** 2000m<sup>3</sup>/hr

**\$16,800**


STAINLESS STEEL SUS304  
MECHANICAL PUSH BUTTON CONTROL  
DUAL MOTOR EXTRACTION SYSTEM  
3 SPEED SETTINGS  
8 X STAINLESS STEEL BAFFLE FILTERS  
6 X 1W LED SPOTLIGHTS  
2 X 600MM ADJUSTABLE  
CHIMNEY STACKS

#### OPTIONAL ACCESSORIES

Carbon filter for recirculation

#### TECHNICAL DATA

Appliance dimension in mm  
(h x w x d): 689-1279 x 700 x 1200  
Rated voltage: 220-240V  
Rated frequency: 50/60Hz  
Max connected load: 646w



## BET120X

### 120CM STAINLESS STEEL T BOX



**EXTRACTION RATE:** 1200m<sup>3</sup>/hr

**\$9,980**


STAINLESS STEEL SUS430  
ELECTRONIC PUSH BUTTON CONTROL  
3 SPEED SETTINGS  
4 X ALUMINUM GREASE FILTERS  
2 X 1.5W LED SPOTLIGHTS  
2 X 500MM ADJUSTABLE  
CHIMNEY STACKS

#### OPTIONAL ACCESSORIES

Carbon filter for recirculation

#### TECHNICAL DATA

Appliance dimension in mm  
(h x w x d): 550-1030 x 1200 x 500  
Rated voltage: 220-240V  
Rated frequency: 50Hz  
Max connected load: 383w

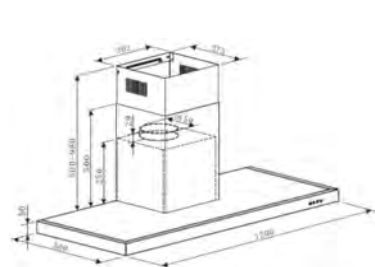

# COOKER HOODS

## BET948X

### 90CM STAINLESS STEEL T BOX



**EXTRACTION RATE:** 1200m<sup>3</sup>/hr

**\$5,980**


STAINLESS STEEL SUS430  
ELECTRONIC PUSH BUTTON CONTROL  
3 SPEED SETTINGS  
PERIMETER EXTRACTION SYSTEM  
3 X ALUMINUM GREASE FILTERS  
1 X 8W LED LIGHT STRIP  
2 X 500MM ADJUSTABLE  
CHIMNEY STACKS

#### OPTIONAL ACCESSORIES

Charcoal filter for recirculation

#### TECHNICAL DATA

Appliance dimension in mm  
(h x w x d): 548-1000 x 900 x 500  
Rated voltage: 220V-240V  
Rated frequency: 50Hz / 60Hz  
Max connected load: 328W



## BET612X /912X

### 60 /90 CM STAINLESS STEEL T BOX



**EXTRACTION RATE:** 1100m<sup>3</sup>/hr

60 CM: **\$3,280** 90 CM: **\$3,380**


STAINLESS STEEL SUS430  
ELECTRONIC PUSH BUTTON CONTROL  
3 SPEED SETTINGS  
ALUMINUM GREASE FILTERS (60CM :  
2PCS / 90CM : 3PCS)  
2 X 1.5W LED SPOTLIGHTS  
2 X 500MM ADJUSTABLE  
CHIMNEY STACKS

#### OPTIONAL ACCESSORIES

Carbon filter for recirculation

#### TECHNICAL DATA

Appliance dimension in mm  
(h x w x d): 528-980 x 600 / 900 x 500  
Rated voltage: 220-240V  
Rated frequency: 50Hz / 60Hz  
Max connected load: 323W



## BET638X

### 60CM STAINLESS STEEL T BOX



**EXTRACTION RATE:** 1200m<sup>3</sup>/hr

**\$4,980**


STAINLESS STEEL SUS430  
ELECTRONIC PUSH BUTTON CONTROL  
3 SPEED SETTINGS  
2 X ALUMINUM GREASE FILTERS  
1 X 1.5W LED LIGHT STRIP  
2 X 500MM ADJUSTABLE  
CHIMNEY STACKS

#### OPTIONAL ACCESSORIES

Charcoal filter for recirculation

#### TECHNICAL DATA

Appliance dimension in mm  
(h x w x d): 548-1000 x 600 x 500  
Rated voltage: 220V-240V  
Rated frequency: 50Hz / 60Hz  
Max connected load: 321.5W





## BES700BGL

### 70CM BLACK GLASS ANGLED



**EXTRACTION RATE:** 1200m<sup>3</sup>/hr

**\$7,880**


TEMPERED BLACK GLASS PANELS  
TOUCH CONTROL OPERATIONS W/  
LCD DISPLAY  
TIMER FUNCTION  
3 SPEED SETTINGS  
PERIMETER EXTRACTION SYSTEM  
2 X 1.5W LED SPOTLIGHTS  
2 X 400MM ADJUSTABLE  
CHIMNEY STACKS

#### OPTIONAL ACCESSORIES

Charcoal filter for recirculation

#### TECHNICAL DATA

Appliance dimensions in mm  
(h x w x d): 460- 1140 x 700 x 430  
Rated voltage: 220-240V  
Rated frequency: 50/60Hz  
Max connected load: 383W  
Fuse rating: 13A  
Noise level: 74dB



## BET528X

### 56CM SLIM STAINLESS STEEL T BOX CHIMNEY



**EXTRACTION RATE:** 1200m<sup>3</sup>/hr

**\$5,380**


STAINLESS STEEL SUS430  
SLIM DEPTH INSTALLATION  
ELECTRONIC PUSH BUTTON CONTROL  
3 SPEED SETTINGS  
1 ALUMINUM GREASE FILTER  
2 X 1.5W LED SPOTLIGHTS  
2 X 320MM ADJUSTABLE  
CHIMNEY STACKS

#### OPTIONAL ACCESSORIES

Charcoal filter for recirculation

#### TECHNICAL DATA

Appliance dimension in mm  
(h x w x d): 360-660 x 565 x 285  
Rated voltage: 220V-240V  
Rated frequency: 50Hz  
Energy class: A  
Max connected load: 383W  
Noise level: 75dB



## TEL69X /99X

### 60 /90CM STAINLESS STEEL TELESCOPIC



**EXTRACTION RATE:** 1100m<sup>3</sup>/hr

60 CM: **\$2,380** 90 CM: **\$2,980**


STAINLESS STEEL SUS430  
DECORATIVE FRONT BAR  
DUAL ROCKER SWITCH CONTROL  
AUTO ON / OFF EXTRACTION SYSTEM  
2 SPEED SETTINGS  
2 ALUMINUM GREASE FILTERS  
2 X 1.5W LED SPOTLIGHTS

#### OPTIONAL ACCESSORIES

Charcoal filter for recirculation

#### TECHNICAL DATA

Appliance dimensions in mm  
(h x w x d): 280 x 600 x 278  
(extends to 470mm)  
Rated voltage: 220-240V  
Rated frequency: 50/60Hz  
Max connected load: 213W  
Max pressure: 335Pa  
Energy class: B  
Noise level: 68dB  
Fuse: 13A








# COOKER HOODS







# COOLING SYSTEMS

TURBO FAN COOLED BUILT-IN CABINET  
**COOL RELIABILITY**





## BRCIF7636


### 248 LITRES BUILT-IN COMBI FROST FREE FRIDGE FREEZER

**\$11,880**

**FROST FREE FREEZER  
FAN CIRCULATION IN FRIDGE &  
AUTO DEFROST  
DUAL THERMOSTAT CONTROL  
ELECTRONIC CONTROL  
TOP & SIDE MOUNTED LED LIGHTS  
FAST COOL & FREEZER FUNCTION  
HOLIDAY MODE  
ECONOMY MODE  
CONTROL PANEL LOCK  
LARGE CRISPER WITH  
MANUAL HUMIDITY CONTROL  
FRESH ZONE COMPARTMENT  
BOTTLE RACK  
4 SAFETY GLASS SHELVES  
3 FREEZER DRAWERS  
REVERSIBLE DOOR SYSTEM**

#### TECHNICAL DATA

Appliance dimensions in mm  
(h x w x d): 1776 x 540 x 540  
Aperture dimensions in mm  
(h x w x d): 1778-1785 x 560 x 550  
EU Energy class: A++  
Star rating: \*\*\*\*  
Freezing capacity: 3kg/24hr  
Noise level: 42dB  
Max connected load: 80W  
Rated voltage: 220-240V  
Rated frequency: 50Hz

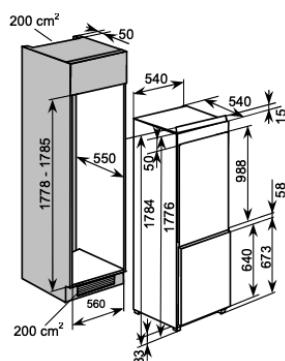

**TOTAL CAPACITY (NET/GROSS): 246/248 litres  
NET CAPACITY (FRIDGE/FREEZER): 190/56 litres**

# COOLING SYSTEMS

## BRUI600

### 116L BUILT UNDER FRIDGE W/ ICE BOX




**TOTAL CAPACITY (NET/GROSS):** 117/116 litres  
**NET CAPACITY (FRIDGE/FREEZER):** 100/16 litres

**\$6,980**

**AUTOMATIC FRIDGE DEFROST**  
**4\* FREEZER ICEBOX**  
**ADJUSTABLE THERMOSTAT**  
**INTERIOR SIDE LIGHT**  
**2 SAFETY GLASS SHELVES**  
**BOTTLE RACK**  
**2 CRISPER CONTAINERS**  
**REVERSIBLE DOOR SYSTEM**  
**ADJUSTABLE FEET**

#### TECHNICAL DATA

Appliance dimensions in mm  
(h x w x d): 818-870 x 596 x 550  
Aperture dimensions in mm  
(h x w x d): 820-870 x 600 x 600  
EU Energy class: A+  
Noise level: 39dB  
Max connected load: 100W  
Rated voltage: 220-240V  
Rated frequency: 50Hz



## BRUL600

### 136L BUILT UNDER FRIDGE




**TOTAL CAPACITY (NET/GROSS):** 136/135 litres

**\$6,980**

**AUTOMATIC FRIDGE DEFROST**  
**ADJUSTABLE THERMOSTAT**  
**INTERIOR SIDE LIGHT**  
**2 SAFETY GLASS SHELVES**  
**BOTTLE RACK**  
**2 CRISPER CONTAINERS**  
**REVERSIBLE DOOR SYSTEM**  
**ADJUSTABLE FEET**

#### TECHNICAL DATA

Appliance dimensions in mm  
(h x w x d): 818-870 x 596 x 550  
Aperture dimensions in mm  
(h x w x d): 820-870 x 600 x 600  
EU Energy class: A+  
Noise level: 41dB  
Max connected load: 100W  
Rated voltage: 220-240V  
Rated frequency: 50Hz



## BRUF600

### 105L BUILT UNDER FREEZER




**TOTAL CAPACITY (NET/GROSS):** 105/95 litres

**\$6,980**

**MANUAL DEFROST FREEZER**  
**ADJUSTABLE THERMOSTAT**  
**FAST FREEZE FUNCTION**  
**3 FREEZER DRAWERS**  
**REVERSIBLE DOOR SYSTEM**  
**ADJUSTABLE FEET**

#### TECHNICAL DATA

Appliance dimensions in mm  
(h x w x d): 818-870 x 596 x 550  
Aperture dimensions in mm  
(h x w x d): 820-870 x 600 x 600  
EU energy class: A+  
Star rating: \*\*\*\*  
Freezing capacity: 4.5kg/24hrs  
Noise level: 41dB  
Max connected load: 100W  
Rated voltage: 220-240V  
Rated frequency: 50Hz





## B545GR

### 545 LITRES FREESTANDING 4 DOOR FRIDGE FREEZER

**S12,800**

**ELECTRONIC TEMPERATURE  
CONTROL UNIT  
LED TOUCH SCREEN  
LED INTERIOR LIGHTING  
SMART SENSORS TECHNOLOGY  
QUICK COOLING FUNCTION  
QUICK FREEZING FUNCTION  
CHILD LOCK**

#### **FRIDGE COMPARTMENT**

**NO FROST  
6 DOOR RACKS  
3 SAFETY GLASS SHELVES  
2 FRUIT & SALAD CRISPER**

#### **FREEZER COMPARTMENT**

**NO FROST  
THROUGH DIVIDER FOR LARGE ITEMS  
4 DRAWERS  
2 SHELVES WITH FLAPS  
FREEZING CAPACITY: 12KG / 24 HRS**

#### **TECHNICAL DATA**

Appliance dimensions in mm (h x w x d):  
1830 x 911 x 636  
Climate class: SN/T  
Compressor type: Inverter  
Refrigerant: R600a  
Foaming agent: C-pentane  
Energy consumption: 1.2kWh/24hrs  
Freezing capacity: 12kg/24hrs  
Rated voltage: 220-240V  
Rated frequency: 50Hz  
Noise level: 42dB  
Star rating: \*\*\*\*



**TOTAL CAPACITY (NET/GROSS): 545 / 541 litres  
NET CAPACITY (FRIDGE/FREEZER): 321/130 litres**

# COOLING SYSTEMS



MORE IS BETTER.



## BWCDZ150SS1-F

### DUAL ZONE 46 BOTTLE WINE CABINET




**DUAL ZONE INDEPENDANT  
TEMPERATURE CONTROL**  
**STAINLESS STEEL DOOR FRAME**  
**AUTO DEFROSTING PANEL**  
**FAN ASSISTED OPERATION**  
**ACTIVATED CARBON FILTER**  
**UV PROTECTED TINTED GLASS**  
**SLIDE OUT TELESCOPIC RAILS**  
**HANDLESS DESIGN WITH HIDDEN HINGES**  
**AUTO ON/OFF INTERIOR LIGHT**  
**DOOR LOCK**  
**REVERSIBLE DOOR**

UPPER ZONE : 5-12°C  
LOWER ZONE : 12-20°C

**TOTAL CAPACITY (NET/GROSS):** 134 / 145 litres  
**CAPACITY (TOP/BOTTOM):** 16/30 bottles

#### TECHNICAL DATA

Appliance dimensions in mm  
(h x w x d): 820 x 595 x 575  
Aperture dimensions in mm  
(h x w x d): 825 x 600 x 580  
Max connected load: 1Kw  
Rated voltage: 220 - 240V  
Rated frequency: 50Hz



## BWC159BGL

### SINGLE ZONE 9 BOTTLE WINE CABINET




**TEMPERATURE CONTROL: 5-20°C**  
**BLACK GLASS DOOR**  
**FAN ASSISTED OPERATION**  
**UV PROTECTED TINTED GLASS**  
**AUTO ON/OFF INTERIOR LIGHT**  
**DOOR LOCK**  
**REVERSIBLE DOOR**

**TOTAL CAPACITY (NET/GROSS):** 22 / 23 litres  
**CAPACITY:** 9 x 0.75 litre bordeaux bottle

#### TECHNICAL DATA

Appliance dimensions in mm  
(h x w x d): 820 x 150 x 525  
Aperture dimensions in mm  
(h x w x d): 825 x 155 x 535  
Max connected load: 1Kw  
Rated voltage: 220 - 240V  
Rated frequency: 50Hz



## BW28.1BL

### SINGLE ZONE 28 BOTTLE WINE CABINET



**TEMPERATURE CONTROL: 12-18°C**  
**BLACK DOOR FRAME**  
**THERMOELECTRIC COOLING SYSTEM**  
**TINTED REFLECTIVE GLASS**  
**INTERIOR LIGHT**  
**RECESSED HANDLE**

**TOTAL CAPACITY (NET):** 65 litres  
**CAPACITY:** 28 bottles

#### TECHNICAL DATA

Appliance dimension in mm  
(h x w x d): 738 x 460 x 520  
Max connected load: 70W  
Rated voltage: 220-240V  
Rated frequency: 50-60Hz

# COOLING SYSTEMS





# WASHING & CLEANING

GENEROUSLY ACCOMODATING  
**DISCRETELY QUIET**





## BWDI1216

### FULL-HEIGHT INTEGRATED WASHER DRYER COMBO




**WASH/SPIN LOAD:** 6kg  
**DRY LOAD:** 3kg  
**MAX SPEED:** 1200rpm

#### 12 PROGRAMS

SPIN SPEED REGULATION  
SEPARATE TEMPERATURE REGULATION  
LCD DISPLAY  
DELAY START  
DIGITAL COUNTDOWN INDICATOR  
ELECTRONIC CONTROL OPERATION  
AUTOMATIC CONSUMPTION REDUCTION  
SELF ADJUSTING WATER LEVEL TO LOAD  
FAILURE DETECTION SYSTEM  
STAINLESS STEEL DRUM  
IMBALANCE CONTROL SYSTEM  
OVERFLOW PROTECTION  
FOAM PROTECTION  
SAFETY LOCK  
FUZZY LOGIC  
GLASS DOOR  
ADJUSTABLE FEET

#### TECHNICAL DATA

Appliance dimension in mm  
(h x w x d): 825-870 x 595 x 535  
Aperture dimension in mm  
(h x w x d): 850-895 x 600 x 580  
Energy Consumption (wash only): 0.98kWh/cycle  
Energy Consumption for (dry only): 4.85kWh/cycle  
Water Consumption (wash only): 46L/cycle  
Noise level (wash/spin/dry): 59/76/58 dB  
Max connected load: 2000W  
Rated voltage: 220-240V  
Rated frequency: 50/60Hz



## BWDF1418W

### 60CM SLIM DEPTH WASHER DRYER COMBO



**WASH/SPIN LOAD:** 8kg  
**DRY LOAD:** 6kg  
**MAX SPEED:** 1400rpm

#### 16 PROGRAMS

LED DISPLAY  
PTC DOOR LOCK  
BLDC MOTOR  
STAINLESS STEEL DRUM  
DELAY START (+ 24 HOURS)  
SPIN SPEED SELECTION  
(0, 400, 800, 1200, 1400)  
TEMPERATURE SELECTION  
(COLD, 200C, 300C,  
400C, 600C, 900C)  
MUTE-WASHING  
CHILD LOCK  
MEMORY  
PREWASH  
EXTRA RINSE

#### TECHNICAL DATA

Appliance dimension in mm  
(h x w x d): 850 x 595 x 475  
Energy Consumption (wash only): 0.88 kWh/cycle  
Energy Consumption (dry only): 4.56kWh/cycle  
Water Consumption (wash only): 64L/cycle  
Noise level (wash/spin/dry): 58/78/62 dB  
Rated voltage: 220-240V  
Rated frequency: 50Hz

# WASHING & CLEANING

## BDWI612

## BDWI452

### 60CM FULL INTEGRATED ELECTRIC DISHWASHER



#### 14 PLACE SETTINGS

##### 6 PROGRAMS


STAINLESS STEEL INTERIOR  
LED DISPLAY  
EXTRA DRYING  
DELAY TIMER (1-24 HOURS)  
HALF LOAD  
CONCEALED HEATING ELEMENT  
THIRD RACK  
GREY BASKETS  
ANTI FLOOD  
ANTI LEAK  
WATER SOFTNESS ADJUSTMENT  
SALT & RINSE AID WARNING  
COLD WATER FILL

##### INCLUDED ACCESSORIES

1x cup rack  
1x cutlery basket  
1x salt funnel  
1x draining hose hanger  
1x inlet pipe  
Fixed hinge

##### TECHNICAL DATA

Appliance dimensions in mm  
(h x w x d) 815 x 598 x 550  
Aperture dimensions in mm  
(h x w x d) min 820 x 600 x 580  
Energy consumption: 0.93kWh/cycle  
(266kWh per Annum)  
Water consumption: 11L/cycle  
(3080L per Annum)  
Noise level: 47dB  
Rated voltage: 220-240V  
Rated frequency: 50/60Hz



### 45CM FULL INTEGRATED ELECTRIC DISHWASHER



#### 9 PLACE SETTINGS

##### 6 PROGRAMS


STAINLESS STEEL INTERIOR  
ELECTRONIC CONTROL LED INDICATORS  
DELAY TIMER (3/6/9/12 HOURS)  
HALF LOAD  
CONCEALED HEATING ELEMENT  
WATER SOFTNESS ADJUSTMENT  
ANTI FLOOD & ANTI LEAK  
GREY BASKETS  
SALT & RINSE AID WARNING  
COLD WATER FILL  
THE THIRD RACK

##### INCLUDED ACCESSORIES

1x cup rack  
1x cutlery basket  
1x salt funnel  
1x draining hose hanger  
1x inlet pipe  
Fixed hinge

##### TECHNICAL DATA

Appliance dimensions in mm  
(h x w x d) 815 x 448 x 550  
Aperture dimensions in mm  
(h x w x d) min 820 x 450 x 580  
Energy consumption: 0.69kWh/cycle  
(197kWh per Annum)  
Water consumption: 9L/cycle  
(2520L per Annum)  
Noise level: 49dB  
Rated voltage: 220-240V  
Rated frequency: 50/60Hz





## BST92BL

### 90L DUAL ZONE BUILT-IN STERILIZER



**UPPER ZONE**  
OZONE + UV + DRYING  
BY MODERATE TEMPERATURE (75°C)

**LOWER ZONE**  
STERILIZING BY FAR  
INFRARED HIGH TEMPERATURE (125°C)


STAINLESS STEEL CAVITY  
TEMPERED GLASS  
LED DISPLAY

#### **TECHNICAL DATA**

Appliance dimensions in mm  
(h x w x d): 600 x 595 x 470  
Aperture dimensions in mm  
(h x w x d): 590 x 560 x min. 500  
Rated voltage: 220V  
Rated frequency: 50Hz  
Max connected load : 700W

## BST41

### 41L COUNTERTOP & CABINET HANGING STERILIZER

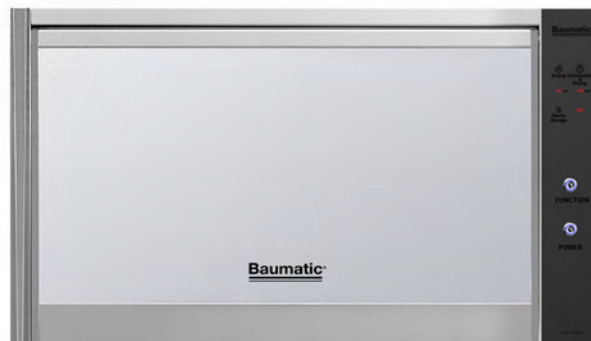

OZONE  
UV LIGHT  
DRYING BY MODERATE TEMPERATURE (75°C)  
ACCURATE TEMPERATURE CONTROL  
24 HOURS STERILIZING STORAGE  
SLIDE IN HIDDEN DOOR

#### **TECHNICAL DATA**

Appliance dimensions in mm  
(h x w x d): 400 x 700 x 325  
Rated voltage: 220V  
Rated frequency: 50Hz  
Max Connected load: 270W



# WASHING & CLEANING



